




# NTN Bearing USA CORP.

## 850 mm x 1500 mm x 515 mm SKF 232/850 CAF/W33 Rodamientos De Rodillos Esf é ricos

Bearing No. 232/850 CAF/W33

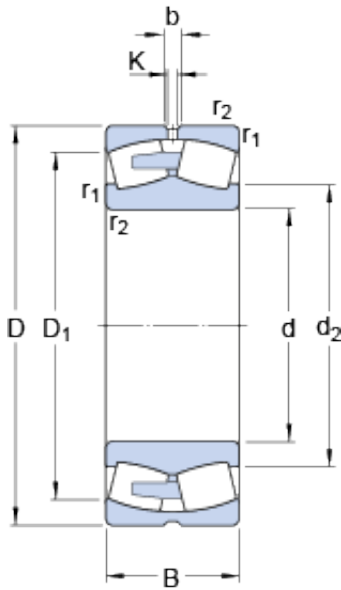

232/850 CAF/W33 Bearing 2D drawings and 3D CAD models

Size	1500x850x515 mm
Bore Diameter	1500 mm
Outer Diameter	850 mm
Width	515 mm
d	850 mm
D	1500 mm
B	515 mm
d <sub>2</sub>	1049 mm
D <sub>1</sub>	1284 mm
b	22.3 mm
K	12 mm
r <sub>1,2</sub> - min.	15 mm
d <sub>a</sub> - min.	908 mm
D <sub>a</sub> - max.	1442 mm
r <sub>a</sub> - max.	12 mm
Basic dynamic load rating - C	27636 kN
Basic static load rating - C <sub>0</sub>	48000 kN
Fatigue load limit - P <sub>u</sub>	2600 kN
Reference speed	160 r/min
Limiting speed	260 r/min
Calculation factor - e	0.33
Calculation factor - Y <sub>1</sub>	2
Calculation factor - Y <sub>2</sub>	3
Calculation factor - Y <sub>0</sub>	2



## NTN Bearing USA CORP.

$d_2$	1049 mm
$D_1$	1284 mm
$r_{1,2}$ min.	15 mm
$d_a$ min.	908 mm
$D_a$ max.	1442 mm
$r_a$ max.	12 mm
Basic dynamic load rating C	27636 kN
Basic static load rating $C_0$	48000 kN
Fatigue load limit $P_u$	2600 kN
Calculation factor e	0.33
Calculation factor $Y_1$	2
Calculation factor $Y_2$	3
Calculation factor $Y_0$	2
Mass bearing	3940 kg